

# FORMING METHOD OF RESIST PATTERN AND FORMING METHOD OF ANTIREFLECTION FILM


Patent number: JP8078322  
Publication date: 1996-03-22  
Inventor: OGAWA TORU; GOCHO TETSUO  
Applicant: SONY CORP  
Classification:  
- international: H01L21/027; C30B25/14; G03F7/11; G03F7/26  
- european:  
Application number: JP19950169089 19950704  
Priority number(s):

[View INPADOC patent family](#)

## Abstract of JP8078322

**PURPOSE:** To provide a stable forming method of a resist pattern and a new forming method of an antireflection film excellently even at the time of the fine resist pattern.

**CONSTITUTION:** An antireflection film ARL composed of a silicon oxide film ( $\text{SiO}_x\text{Ny}$  or  $\text{SiO}_x\text{NyHz}$ ) containing at least nitrogen is formed onto a foundation substrate S directly or through another layer. A photo-resist PR is formed onto the antireflection film ARL directly or through another layer. The photo-resist PR is exposed, and a mask pattern is transferred. It is favorable that an antireflection film having a reflection refractive index (n) from 1.2 to 3.4 in an exposure wavelength of 150-450nm, an absorption refractive index (k) from 0.16 to 0.72 and film thickness from 10nm to 100nm is formed as the antireflection film.

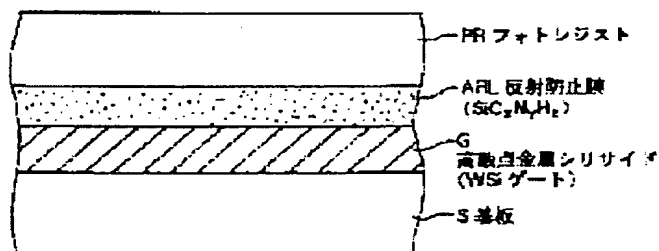

Data supplied from the [esp@cenet](mailto:esp@cenet) database - Worldwide

EV372455910